

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
5 February 2004 (05.02.2004)

PCT

(10) International Publication Number  
WO 2004/011299 A3

(51) International Patent Classification<sup>7</sup>: F16F 1/34, 1/36,  
F16M 13/00, B62D 23/00

[US/US]; 5416 Lonesome Oak Court, Fort Wayne, IN  
46845 (US); BYKOWSKI, Scott [US/US]; 902 South 600  
West, Angola, IN 46703 (US).

(21) International Application Number:  
PCT/US2003/023175

(74) Agent: NAUMAN, Timothy, E.; Fay, Sharpe, Fagan,  
Minnich & McKee, LLP, 7th Floor, 1100 Superior Avenue,  
Cleveland, OH 44114 (US).

(22) International Filing Date: 25 July 2003 (25.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/398,847 25 July 2002 (25.07.2002) US

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): COOPER  
TECHNOLOGY SERVICES, LLC [US/US]; 701 Lima  
Avenue, Findlay, OH 45840 (US).


(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): LEW, John, G.

[Continued on next page]

(54) Title: BREAK-AWAY CRADLE OR SUB-FRAME MOUNT AND RETAINER WASHER ASSEMBLY

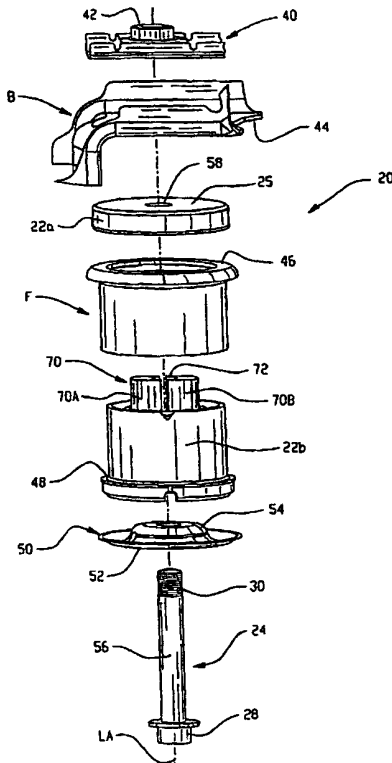

(57) Abstract: An isolator assembly (20) such as a cradle mount or a body mount assembly incorporates break-away features. An insert (70, 70') includes a thinned cross-sectional region (100) or a gap/interface (90) between insert portions (70a, 70b) that allow a bolt (24) to break-away under a predetermined load in a fore direction (80) and an aft direction (90). In addition, a retainer washer (50) may have an irregular configuration such as a tear-drop or clover-leaf configuration that cooperates with the insert (70, 70') to allow the isolator assembly (20) to pull away in the negative z-direction under a predetermined load.